

OPENING



Step 1 : If there's a strong wind blowing, park your vehicle with the nose facing into the wind.

Step 2 : Undo the two securing catches and lift the lid.



Step 3 : After you've lifted the lid a little, the gas struts will kick into action and open the tent fully.

Step 4 : Pull the compression elastic down and secure by positioning around the base of the tent canvas.




Step 5 : Remove ladder bag and pole bag from inside the tent.

Step 6 : Remove poles from inside the bag.



Step 7 : Place pole into lower tube and then hook onto canvas eyelet.

Step 8 : Remove ladder from bag.

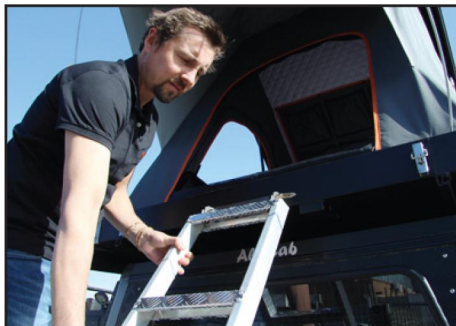

Step 9 : Slot ladder onto catch and secure. Note, additional ladder brackets can be specified (or ordered) and installed on the sides for side entry.


Step 10 : Place pole bag into ladder bag, and store in secure place.



Step 11 : The light switch is located on the side of the frame (RHS). Move the mattress slightly and you will notice the switch together with the USB ports.

For an operating video, visit our website (www.alu-cab.com).

If you have any other queries, please feel free to contact us by email on queries@alu-cab.co.za

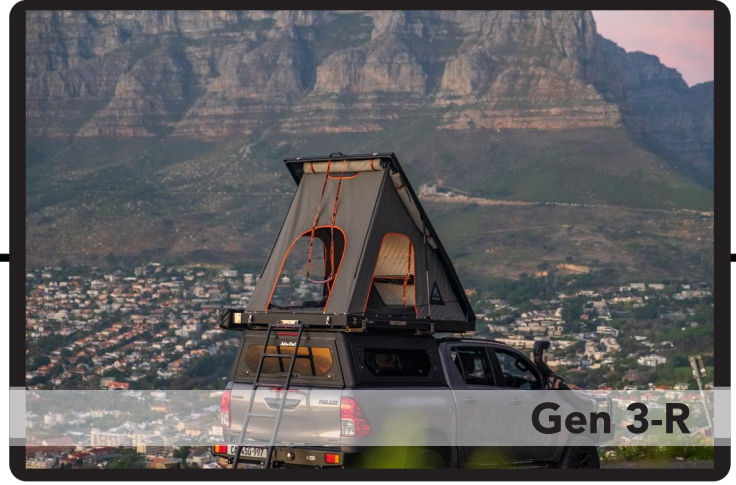

Gen 3-R

CLOSING



Step 1 : Retrieve ladder bag with pole bag inside.

Step 2 : Remove pole bag.

Step 3 : Even out bedding.



Step 4 : Remove poles, top first, then bottom.

Step 5 : Put poles back into bag and place inside tent.



Step 6 : Remove ladder from tent.

Step 7 : Put ladder into bag.

Step 8 : Place ladder inside tent. Be careful to not place ladder over the front lip of the tent as this can cause damage when closing the lid of the tent.



Step 9 : Lift compression elastic to middle of canvas.

Step 10 : Place pull-down strap between elastic and canvas.

Step 11 : To close lid, pull strap downwards. This may be done using body weight rather than arm strength.



Step 12 : Grab handle on roof when it comes into reach, and use it to pull the lid closed. Make sure the canvas is tucked in on both sides before closing. Also, make sure at least one window is open when closing tent or the trapped air makes closing very difficult.



Step 13 : Secure lid by fastening both catches.

NOTES

- Avoid closing the tent while it's still wet or damp. If this isn't possible, take the opportunity to air and dry the tent at the earliest opportunity.
- Be careful to store the ladder against the rear of the tent before closing the lid.
- Make sure the canvas is tucked on the sides when closing the tent. Failure to do so can lead to damage
- If you're loading items onto the roof, make use of the accessories rails and approved roof-racks or load bars. The load bars are designed to carry a maximum weight of 50 kg. With this added weight it requires more strength when opening the tent as gas lifts only assist. The roof panels themselves are not designed to carry weight and will dent if you place items onto them.
- If your tent is equipped with an electrical kit (lights & power points), make sure these are turned off and unplugged during transit/storage.